

Ion® SH30i

Sump Pump




Pump Features

- Basement Sump
- Septic Tank Effluent
- Dewatering
- Carbon ceramic mechanical seal
- Oil-filled motor with automatic reset thermal overload
- Uses single-row ball bearing construction
- Ion® digital level control piggyback switch has no moving parts (standard)
- 3 year residential warranty

System Specifications

Typical Applications	<ul style="list-style-type: none"> • Basement sump • Dewatering • Septic tank effluent
Maximum Capacity	Up to 47 GPM
Maximum Head	Up to 35'
Electrical Data	115 V, 1 Ø, 7.0 FLA, 60 Hz
Motor Data	3/10 HP, 3450 RPM
Recommended Minimum Basin Size	18" x 24"
Automatic Operation	I: Ion Digital Level Control (standard) W: Wide angle float V: Vertical float
Manual Operation	M: Manual
Materials of Construction	Cast iron
Impeller	Cast iron vortex
Power Cord	20' Standard
Discharge Size	1½" NPT
Solids Handling	¾"

Pump Performance

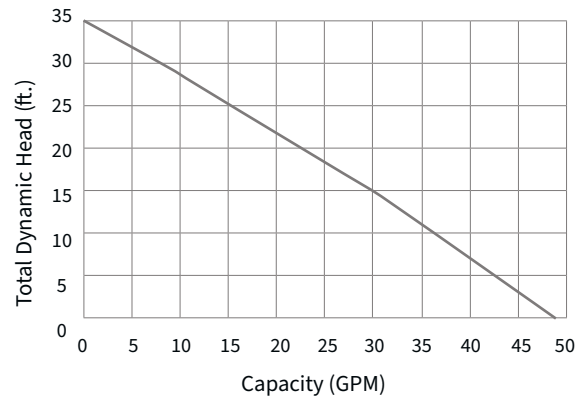

Pump Dimensions

