

Ion® X-ONEi

Submersible All In One Pump



Pump Features

- Applications
 - Basement Sump
 - Septic Tank Effluent
 - Sewage Ejector
- Carbon ceramic mechanical seal
- Oil-filled motor with automatic reset thermal overload protection
- Upper and lower single-row ball-bearing construction
- Ion® digital level control piggyback switch has no moving parts (standard)
- 3 year residential warranty

System Specifications

Typical Applications

- Basement sump
- Sewage Ejector
- Septic tank effluent

Maximum Capacity Up to 80 GPM

Maximum Head Up to 20'

Electrical Data 115 V, 1 Ø, 8.2 FLA, 60 Hz

Motor Data ½ HP, 3450 RPM

Intermittent Liquid Temperature 120° F

Recommended Minimum Basin Size 18" x 24"

Automatic Operation **i:** Ion Digital Level Control (standard)
V: Vertical switch
W: Wide angle switch

Manual Operation **M:** Manual


Materials of Construction Cast iron & engineered thermoplastic

Power Cord 10' Standard

Discharge 2" with 1½" reducer

Solids 1½" to 2"

Pump Performance

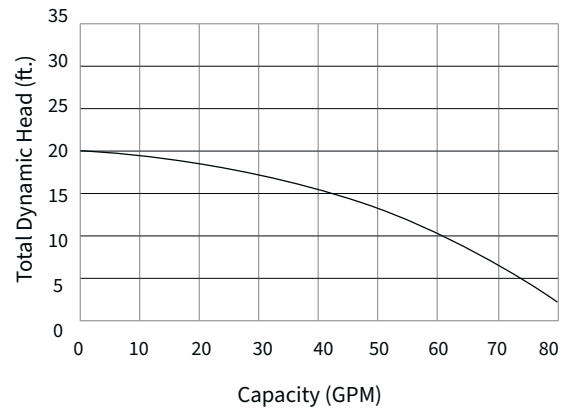

Pump Dimensions

